
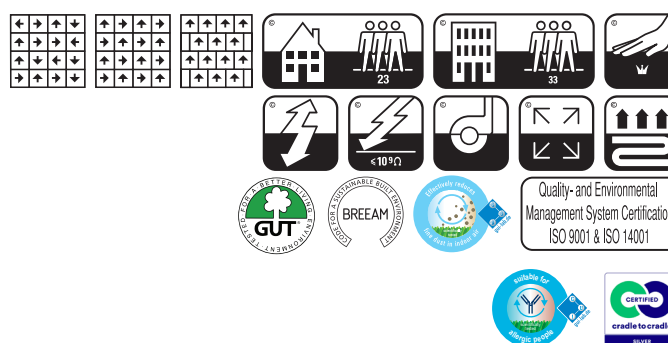


# Grezzo Bloom EcoBase

Preliminary specification according to EN 1307

|                                        |                  |                |                                                                                          |        |        |      |      |      |
|----------------------------------------|------------------|----------------|------------------------------------------------------------------------------------------|--------|--------|------|------|------|
| Type of manufacture                    | ISO 2424         |                | Tufted 1/10 “                                                                            |        |        |      |      |      |
| Aspect                                 | ISO 2424         |                | Structured loop pile                                                                     |        |        |      |      |      |
| Dye method                             |                  |                | Solution dyed                                                                            |        |        |      |      |      |
| Dimension                              | EN ISO 24342     | cm x cm        | 50 x 50 / 19,68” x 19,68” (20 tiles per box)                                             |        |        |      |      |      |
| Primary backing                        | ISO 2424         |                | Polyester fleece                                                                         |        |        |      |      |      |
| Secondary backing                      | ISO 2424         |                | EcoBase - 100% recyclable, contains on average 80% positively defined recycled content.* |        |        |      |      |      |
|                                        |                  |                |                                                                                          |        |        |      |      |      |
| Pile fibre composition                 | ISO 2424         |                | BCF Polyamide 6                                                                          |        |        |      |      |      |
| Total thickness                        | ISO 1765         | mm             | 7.0                                                                                      | inch   | 0.3    |      |      |      |
| Effective pile thickness               | ISO 1766         | mm             | 3.5                                                                                      | inch   | 0.14   |      |      |      |
| Total mass                             | ISO 8543         | g/m²           | 4150                                                                                     | oz/yd² | 122.5  |      |      |      |
| Total pile mass                        | ISO 2424         | g/m²           | 650                                                                                      | oz/yd² | 19.2   |      |      |      |
| Effective pile mass                    | ISO 8543         | g/m²           | 395                                                                                      | oz/yd² | 11.7   |      |      |      |
| Pile density                           | ISO 8543         | g/cm³          | 0.113                                                                                    | lb/in³ | 0.0041 |      |      |      |
| Number of tufts                        | ISO 1763         | /dm²           | 1580                                                                                     | /yd²   | 132104 |      |      |      |
| Stroll test                            | ISO 6356         | kV             | ≤ 2,0                                                                                    |        |        |      |      |      |
| Vertical resistance                    | ISO 10965        | Ohm            | ≤ 1 x 10 <sup>9</sup>                                                                    |        |        |      |      |      |
| Horizontal resistance                  | ISO 10965        | Ohm            | -                                                                                        |        |        |      |      |      |
| Use classification                     | EN 1307          |                | 33 Commercial - heavy use                                                                |        |        |      |      |      |
| Luxury rating                          | EN 1307          |                | LC 1                                                                                     |        |        |      |      |      |
| Dimensional stability                  | EN 986           | %              | ≤ 0,2                                                                                    |        |        |      |      |      |
| Impact sound reduction ΔL <sub>w</sub> | ISO 10140        | dB             | 25                                                                                       |        |        |      |      |      |
| Sound absorption                       | ISO 354          | Freq. Hz       | 125                                                                                      | 250    | 500    | 1000 | 2000 | 4000 |
|                                        |                  | α <sub>s</sub> | 0.01                                                                                     | 0.03   | 0.08   | 0.19 | 0.33 | 0.36 |
| Noise reduction                        | ISO 354          | α <sub>w</sub> | 0.20                                                                                     |        |        |      |      |      |
| Thermal resistance                     | ISO 8302         | m².K/W         | 0.082                                                                                    |        |        |      |      |      |
| Flammability                           | EN 13501-1       |                | Bfl - s1 (loose laid tested)                                                             |        |        |      |      |      |
| Prodis - GUT                           | www.pro-dis.info |                |                                                                                          |        |        |      |      |      |

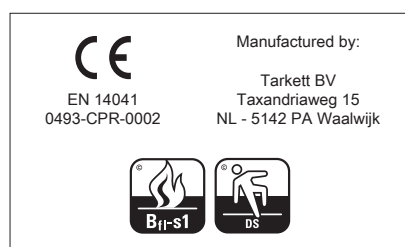

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.1. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com) For products with acoustic backing: SoundMaster/SoundMaster Lite backings contain 80% recycled polyester felt, SoundMaster Thrive is a low anti-mony polyester felt.



DESSO flooring products are to be installed in full accordance with Tarkett's installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. DESSO flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit [www.tarkett.com](http://www.tarkett.com)

EN-20230213

# Grezzo Vivid EcoBase

Preliminary specification according to EN 1307

|                                        |                  |                |                                                                                          |        |        |      |      |      |
|----------------------------------------|------------------|----------------|------------------------------------------------------------------------------------------|--------|--------|------|------|------|
| Type of manufacture                    | ISO 2424         |                | Tufted 1/10 “                                                                            |        |        |      |      |      |
| Aspect                                 | ISO 2424         |                | Structured loop pile                                                                     |        |        |      |      |      |
| Dye method                             |                  |                | Solution dyed                                                                            |        |        |      |      |      |
| Dimension                              | EN ISO 24342     | cm x cm        | 50 x 50 / 19,68” x 19,68” (20 tiles per box)                                             |        |        |      |      |      |
| Primary backing                        | ISO 2424         |                | Polyester fleece                                                                         |        |        |      |      |      |
| Secondary backing                      | ISO 2424         |                | EcoBase - 100% recyclable, contains on average 80% positively defined recycled content.* |        |        |      |      |      |
|                                        |                  |                |                                                                                          |        |        |      |      |      |
| Pile fibre composition                 | ISO 2424         |                | BCF Polyamide 6                                                                          |        |        |      |      |      |
| Total thickness                        | ISO 1765         | mm             | 7.0                                                                                      | inch   | 0.3    |      |      |      |
| Effective pile thickness               | ISO 1766         | mm             | 3.5                                                                                      | inch   | 0.14   |      |      |      |
| Total mass                             | ISO 8543         | g/m²           | 4150                                                                                     | oz/yd² | 122.5  |      |      |      |
| Total pile mass                        | ISO 2424         | g/m²           | 650                                                                                      | oz/yd² | 19.2   |      |      |      |
| Effective pile mass                    | ISO 8543         | g/m²           | 395                                                                                      | oz/yd² | 11.7   |      |      |      |
| Pile density                           | ISO 8543         | g/cm³          | 0.113                                                                                    | lb/in³ | 0.0041 |      |      |      |
| Number of tufts                        | ISO 1763         | /dm²           | 1580                                                                                     | /yd²   | 132104 |      |      |      |
| Stroll test                            | ISO 6356         | kV             | ≤ 2,0                                                                                    |        |        |      |      |      |
| Vertical resistance                    | ISO 10965        | Ohm            | ≤ 1 x 10 <sup>9</sup>                                                                    |        |        |      |      |      |
| Horizontal resistance                  | ISO 10965        | Ohm            | -                                                                                        |        |        |      |      |      |
| Use classification                     | EN 1307          |                | 33 Commercial - heavy use                                                                |        |        |      |      |      |
| Luxury rating                          | EN 1307          |                | LC 1                                                                                     |        |        |      |      |      |
| Dimensional stability                  | EN 986           | %              | ≤ 0,2                                                                                    |        |        |      |      |      |
| Impact sound reduction ΔL <sub>w</sub> | ISO 10140        | dB             | 25                                                                                       |        |        |      |      |      |
| Sound absorption                       | ISO 354          | Freq. Hz       | 125                                                                                      | 250    | 500    | 1000 | 2000 | 4000 |
|                                        |                  | α <sub>s</sub> | 0.01                                                                                     | 0.03   | 0.08   | 0.19 | 0.33 | 0.36 |
| Noise reduction                        | ISO 354          | α <sub>w</sub> | 0.20                                                                                     |        |        |      |      |      |
| Thermal resistance                     | ISO 8302         | m².K/W         | 0.082                                                                                    |        |        |      |      |      |
| Flammability                           | EN 13501-1       |                | Bfl - s1 (loose laid tested)                                                             |        |        |      |      |      |
| Prodis - GUT                           | www.pro-dis.info |                |                                                                                          |        |        |      |      |      |

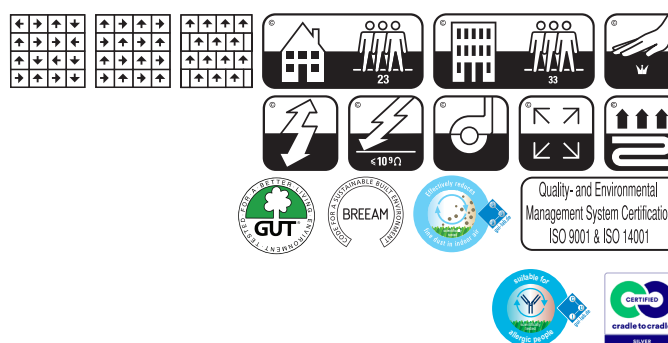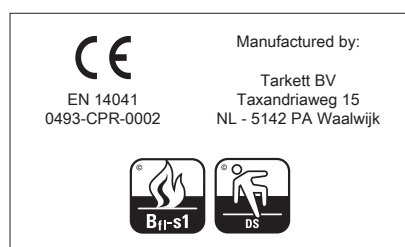

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.1. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com) For products with acoustic backing: SoundMaster/SoundMaster Lite backings contain 80% recycled polyester felt, SoundMaster Thrive is a low anti-mony polyester felt.

DESSO flooring products are to be installed in full accordance with Tarkett's installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. DESSO flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit [www.tarkett.com](http://www.tarkett.com)

EN-20230213